

# OmniTechLink Enterprise NVR 3U Series

OmniTechLink Enterprise NVR 3U Series provides a systematic and professional solution with video input, storage, transfer and device management functions. It is pre-loaded with the latest Windows-based OmniTechLink VMS Enterprise system and pre-load licenses to deliver a ready to deploy solution.



## DATASHEET

## KEY FEATURES

### Flexible & Scalable Storage

Support 16\*20TB storage and expandable disk capacity.

### High Data Availability

Freely form multi-server systems to achieve data concentration.

### Auto Power System

With hardware based power-on self-starting for care-free maintenance.

### Compatibility

Fully integrate with OmniTechLink network camera, sensors and 3rd party network cameras.



## Out-of-the-box ready solution & Fine-grained management

- Pre-configured latest VMS system is free to install and configure in minutes.
- Client/Server architecture achieves centralized resource management.
- Device, Recording, Users & Roles, Event & Alarm Management and other complex needs can be met by one system.

## Reliability and Usability

- Load Balancing delivers increased scalability and flexibility.
- N+M Failover ensures uninterrupted recording and boosts risk resistance.

# OmniTechLink Enterprise NVR 3U Series




		OTL-NVR1604-A	OTL-NVR1608-A
<b>Devices</b>	Included Camera Access License	64	128
<b>Recording</b>	Recording Schedule	64	128
<b>Bandwidth</b>	Incoming Bandwidth	1920Mbps	
	Outgoing Bandwidth	1920Mbps	
<b>Decoding</b>	Video Format	MJPEG, H.264, H.265	
	Decoding Resolution	Up to 12 MP	
	Decoding Capability	12MP(4000*3000)@20fps=6CH 8MP(3840*2160)@30fps=6CH 2MP(1920*1080)@30fps=39CH 720P(1280*720)@30fps=52CH D1(704*576)@30fps=64ch	
<b>Event &amp; Alarm</b>	Event and Alarm Rules	1000	
<b>Users &amp; Roles</b>	Concurrent Accesses via Clients, App Clients	300	
	Users	1000	
	Roles	100	
<b>Local Viewing</b>	Local Viewing	Support	
<b>System</b>	Main Processor	Intel Core 12 <sup>th</sup> i5	Intel Core 12 <sup>th</sup> i7
	Memory	2*8GB DDR4	
	Network Interface	2*1000Mbps RJ-45 ports 1*2.5Gbps RJ-45 ports	
	Operating System	Microsoft Windows 10 IoT Enterprise 64bit	
	GPU Options	Integrated GPU	
	Auto Power On	Support	
<b>Auxiliary Interface</b>	HDD Drives (Video Data)	16*SATA (3.5" or 2.5") Support hot-plug	
	SSD Drive (Operating System)	2*M.2 SSD(1*250GB Pre-installed)	
	RAM	4* DDR4 Slot(2*8GB Pre-installed) Support Dual-Channel Mode	
	Capacity	Up to 20TB capacity for each disk	
	RAID	Support RAID 0, 1, 5, 6, 10, 50, 60	
	LAN	1*2.5Gbps, 2*1000Mbps	
	Display	2*HDMI Port, 1*DP Port Support independent and synchronous display	
	Audio	3*Audio Jacks	
	USB Interface	Front panel: 2*USB 3.0; Rear panel: 4*USB 2.0, 2*USB 3.2 Gen2	
	Power Supply	AC 100-240V, 50-60Hz, redundant power supply	
<b>General</b>	Chassis	3U	
	Consumption	≤75W(without HDD)	
	Working Temperature	0°C to +50°C (32°F to 122°F)	
	Working Humidity	10% to 90% RH (no freezing and no condensation)	
	Weight	17kg(without rail)/19kg(with rail )	
	Dimensions	480X675X133.5mm	
	Warranty	3 Years	




## Interfaces

### OTL-NVR1604-A/OTL-NVR1608-A

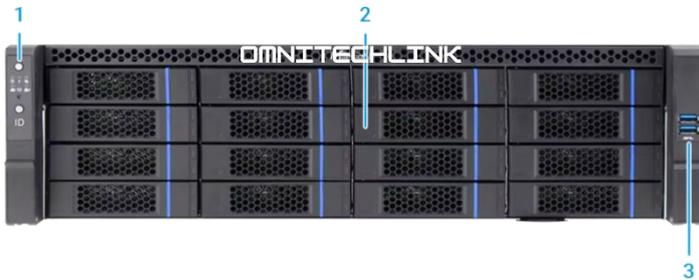


- 1. Power Button
- 2. Disk Slots
- 3. 2\*USB 3.0

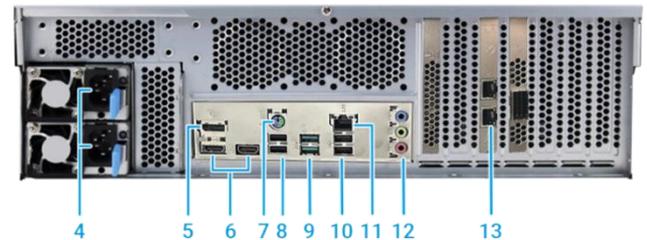

- 4. 2\*Power Port
- 5. Display Port
- 6. 2\*HDMI Port
- 7. PS/2 Port
- 8. 2\*USB 2.0
- 9. 2\*USB 3.2 Gen2
- 10. 2\*USB 2.0
- 11. LAN Port 2.5Gbps
- 12. 3\*Audio Jacks
- 13. 2\*LAN Port 1000Mbps

## Device Connection Topology

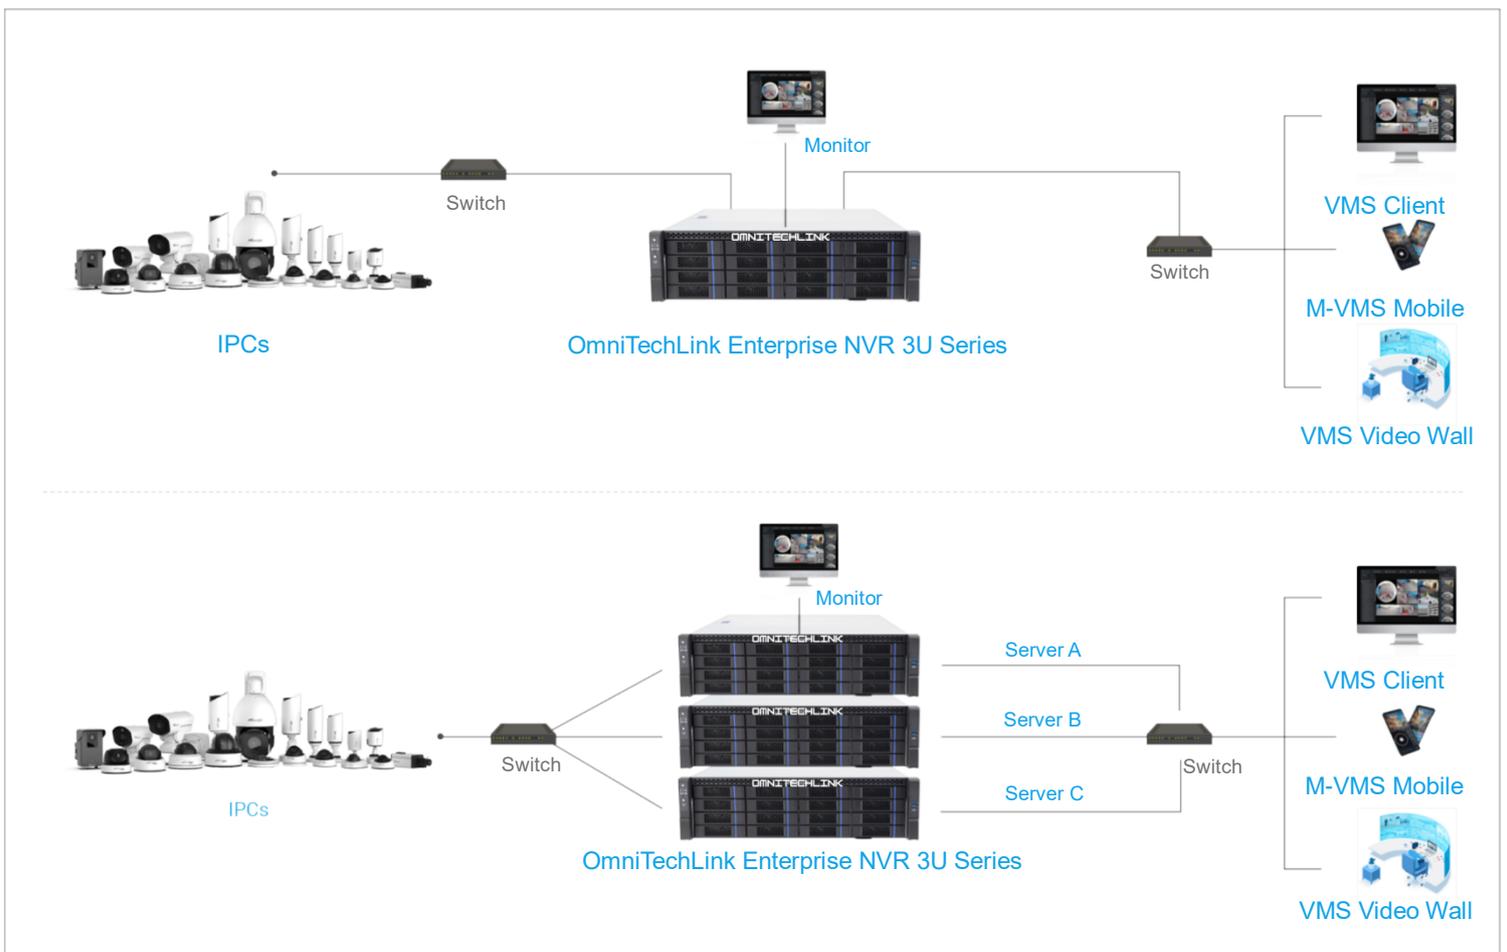

Note: @2024 OmniTechLink is registered trademarks or trademark applications in various jurisdictions.  
 All other company names and products are trademarks or registered trademarks of their respective companies.  
 We reserve the right to introduce modifications without notice.

